


PRODUCT SPECIFICATION

100m Parallel MMF 100G SR4 QSFP28 Optical Transceiver

FEATURES:

- ★ Hot-pluggable QSFP28 form factor
- ★ Supports 103.1Gb/s aggregate bit rate
- ★ Power dissipation < 2.5W
- ★ RoHS-6 compliant
- ★ Commercial case temperature range of 0° C to 70° C
- ★ Single 3.3V power supply
- ★ Maximum link length of 100m on OM4 Multimode Fiber (MMF)
- ★ 4x25Gb/s 850nm VCSEL-based transmitter
- ★ 4x25G electrical interface
- ★ MDC interface

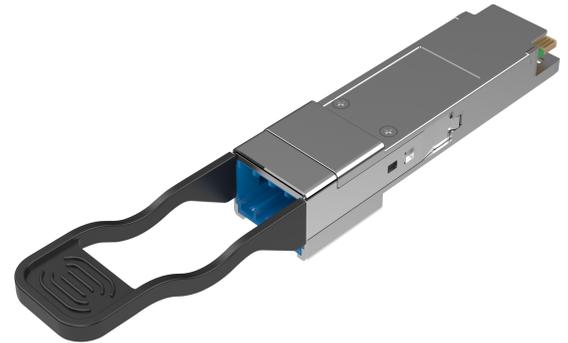

APPLICATIONS:

- ★ 100GBASE-SR4 100G Ethernet

DESCRIPTION:

100G QSFP28 transceiver modules are designed for use in 100 Gigabit Ethernet links over multimode fiber. They are compliant with the QSFP28 MSA and IEEE 802.3bm 100GBASE-SR4 and CAUI-4. Digital diagnostics functions are available via the I2C interface, as specified by the QSFP28 MSA. The transceiver is RoHS-6 compliant per Directive 2011/65/EU.

■ Absolute Maximum Ratings

Parameter	Symbol	Min.	Typical	Max.	Unit
Storage Temperature	T _S	-40		+85	°C
Case Operating Temperature	T _A	0		70	°C
Supply Voltage	V _{CC}	-0.5		4	V
Relative Humidity	RH	0		85	%
Receiver Damage Threshold, per Lane	P _{Rdmg}	3.4			dBm

■ Electrical Characteristics (EOL, TOP = 0 to 70C, V_{CC} = 3.135 to 3.465 Volts)

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Supply Voltage	V _{CC}	3.135		3.465	V	
Supply Current	I _{CC}			800	mA	
Module total power	P			2.5	W	
Transmitter Section:						
Signaling rate per lane		25.78125 ± 100ppm			Gb/s	
Differential pk-pk input voltage tolerance	V _{in,pp,diff}			900	mV	
Single-ended voltage tolerance	V _{in,pp}	-0.35		+3.3	V	
Module stress input test		Per Section 83E.3.4.1, IEEE 802.3bm			V	
Receiver Section:						
Signaling rate per lane		25.78125 ± 100ppm			V	
Differential data output swing	V _{out,pp}	100		400	mV _{pp}	
		300		600		
		400	600	800		
		600		1200		
Eye width		0.57			UI	
Eye height, differential		228			mV	
Vertical eye closure	VEC	5.5			dB	
Transition time (20% to 80%)	t _r , t _f	12			ps	

■ Optical Characteristics (EOL, TOP = 0 to 70C, V_{CC} = 3.135 to 3.465 Volts)

Parameter	Symbol	Min.	Typical	Max.	Unit	Note
Transmitter Section:						
Signaling Speed per Lane		25.78125 ± 100ppm			Gb/s	1
Center Wavelength	λ _t	840	850	860	nm	
RMS spectral width	Δλ			0.6	nm	

Average Optical Power per Lane	TXP _x	-8.4		2.4	dBm	
Optical Power OMA per Lane	T _x OMA	-6.4		3	dBm	
Launch Power [OMA] minus TDEC per Lane	P-TDEC	-7.3			dBm	
TDEC per Lane	TDEC			4.3	dBm	
Optical Extinction Ratio	ER	2			dB	
Optical Return Loss Tolerance	ORL			12	dB	
Encircled Flux	FLX	>86% at 19 um <30% at 4.5 um			dB	
Average Launch Power of OFF Transmitter, per Lane				-30	dBm	
Transmitter Eye mask definition {X1, X2, X3, Y1, Y2, Y3}		{0.3,0.38,0.45,0.35,0.41,0.5}				2
Receiver Section:						
Signaling Speed per Lane		25.78125 ± 100ppm			Gb/s	3
Center Wavelength	λ _r	840		860	nm	
Damage Threshold	DT	3.4			dBm	
Average Receive Power per Lane	RXP _x	-10.3		2.4	dBm	
Receive Power (OMA) per Lane	R _x OMA			3	dBm	
Receiver Reflectance	R _{fl}			-12	dB	
Stressed Sensitivity (OMA)	SRS			-5.2	dBm	4
Stressed Conditions:						
Stressed Eye Closure	SEC	4.3			dB	
Stressed Eye J2 Jitter	J2	0.39			UI	
Stressed Eye J4 Jitter	J4	0.53			UI	
OMA of each aggressor lane		3			dBm	
Stressed Receiver Eye Mask Definition {X1, X2, X3, Y1, Y2, Y3}		{0.28,0.5,0.5,0.33,0.33,0.4}				5
Los De-Assert	LOS _D			-13	dBm	
Los Assert	LOS _A	-30			dBm	
Los Hysteresis	LOS _H	0.5	2		dB	


Note:

1. Transmitter consists of 4 lasers operating at a maximum speed of 25.78125Gb/s ±100ppm each.
2. Hit Ratio 1.5 x 10⁻³ hits/sample.
3. Receiver consists of 4 photo detectors operating at a maximum speed of 25.78125Gb/s ±100ppm each.
4. Minimum value is informative only and not the principal indicator of signal strength.
5. Hit Ratio 5 x 10⁻⁵ hits/sample

■ **General Specifications**

Parameter	Symbol	Min.	Typical	Max.	Unit
Bit Rate (all wavelengths combined)	BR			103.1	Gb/s
Bit Error Ratio (pre-FEC)	BER			5x10 ⁻⁵	
Maximum Supported Distances					
Fiber Type					
OM3 MMF	Lmax1			70	m
OM4 MMF	Lmax2			100	m

■ Pin Assignment:

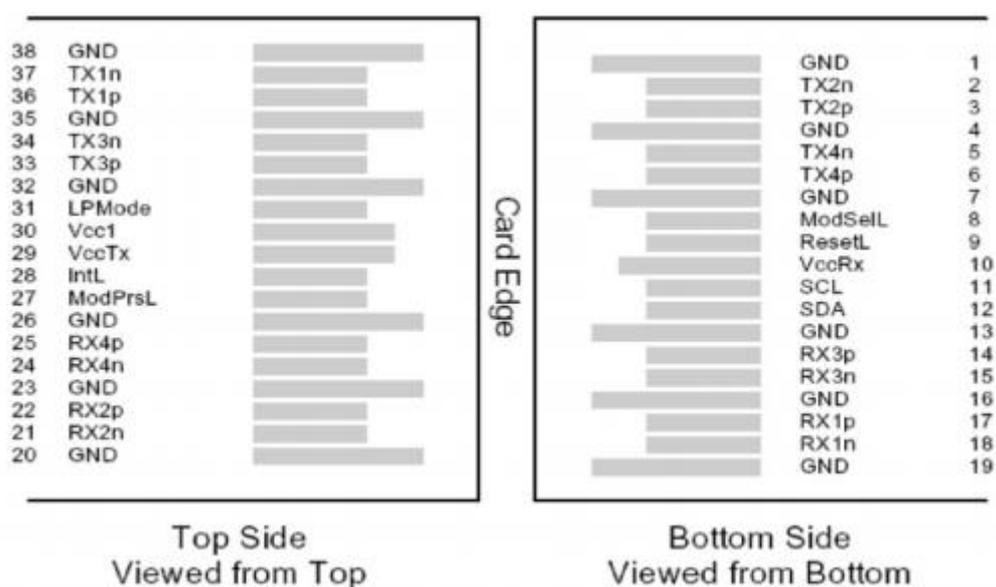

■ Digital Diagnostics Functions


The QSFP28 transceivers support the I2C-based diagnostics interface specified by the QSFP28 MSA.

■ Memory Contents

Per the QSFP28 MSA.

■ Mechanical Specifications

Per the QSFP28 MSA.

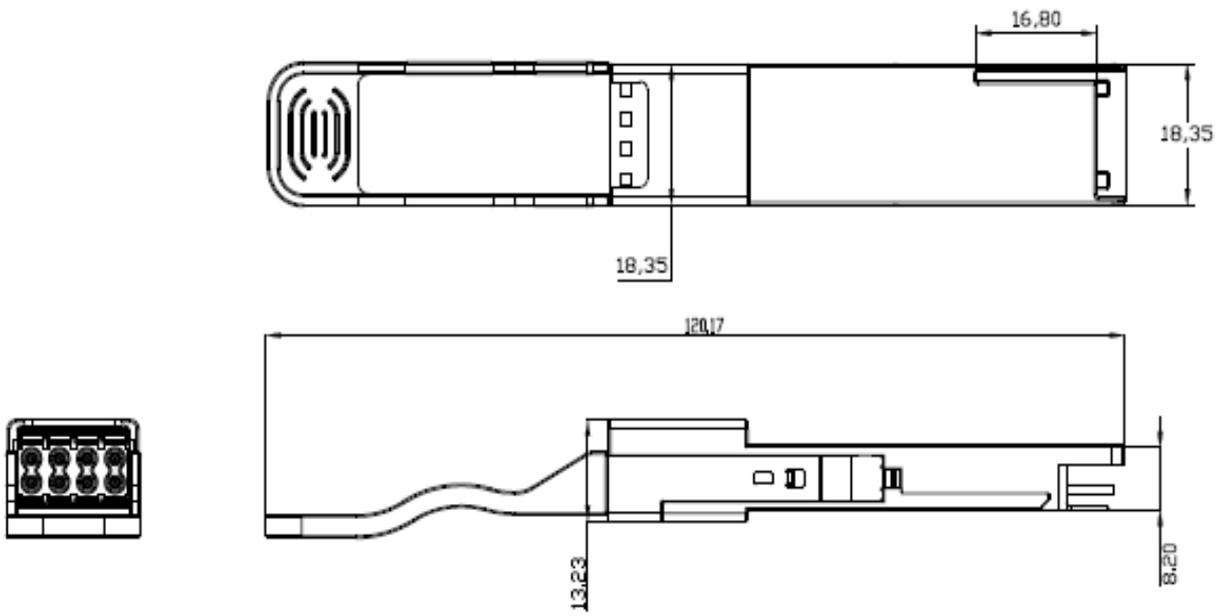

Mechanical Dimensions