UNCONTROLLED DOCUMENT

1.20 [0.047]

1.00 [0.039] MAX.

ANODE -

0.50 [0.020] SQR. \_\_|


-2.00 [0.079]

2.54 [0.100]

-6.00 [0.236]-

27.00 [1.063]

-ø3.40 [ø0.134]

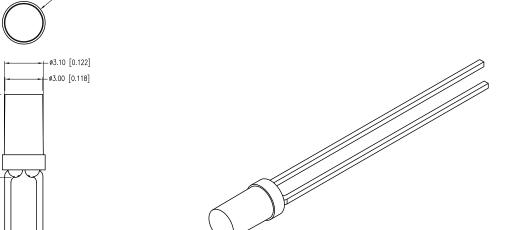

PART NUMBER	SSL-LX30FT14GD	REV.	В
DATE	E.C.N. NUMBER AND REVISION COMMENTS		REV.
4.20.01	E.C.N. #10BRDR. & REDRAWN IN 3D.		Α.
07.12.12	E.C.N. #10BRDR. & REDRAWN.		В

ELECTRO-OPTICAL	CHARACTERISTICS Ta=	25°C If=20mA			
PARAMETER	MIN	TYP	MAX	UNITS	TEST COND
PEAK WAVELENGTH		565		nm	
FORWARD VOLTAGE		2.2	2.6	Vf	
REVERSE VOLTAGE	5.0			Vr	Ir=100µA
AXIAL INTENSITY		10		mcd	If=20mA
VIEWING ANGLE		100		2x theta	
EMITTED COLOR:	GREEN				
LENS FINISH:	GREEN DIFFUSED				

LIMITS OF SAFE OPERATION AT 25°C		
PARAMETER	MAX	UNITS
PEAK FORWARD CURRENT*	150	mA
STEADY CURRENT	25	mA
POWER DISSIPATION	105	mW
DERATE FROM 25°C	-1.6	mW/*C
OPERATING TEMP.	-40 TO +85	•C
STORAGE TEMP.	-40 TO +85	*C
SOLDERING TEMP.	+260	•C
2.0mm FROM BODY	3	SEC.

\* t<10µS

*UNLESS OTHERWISE SPECIFIED TOLERANCES PER DECIMAL PRE	CISION ARE: X=±1 (±0.039), X.X=±0.5	( $\pm 0.020$ ), X.XX= $\pm 0.25$ ( $\pm 0.010$ ), X.XXX= $\pm 0.127$ ( $\pm 0.005$ ).	LEAD SIZE= $\pm 0.05$ ( $\pm 0.002$ ), LEAD LENGTH= $\pm 0.75$ ( $\pm 0.030$ ). MIN= $^{+DECIMAL\ PREC}_{-0.00}$	ISION MAX.= +0.00 -DECIMAL PRECISION	UNC	ONTROLL.	ED DOCUN	WENT

Creating LED and LCD Solutions Together™

© 290 E. HELEN ROAD PALATINE, IL 60067-6976 PHONE: +1.847.359.2790 FAX: +1.847.359.6538 WEB: WWW.LUMEX.COM MEMBER OF ITW PHOTONICS GROUP

QUASARBRITE	T-3mm	(T-1)	FLAT	TOP	GREEN L	.ED.

\*\*THE SPECIFICATIONS MAY CHANGE AT ANY TIME WITHOUT NOTICE DUE TO NEW MATERIALS OR PRODUCT IMPROVEMENT.\*\*

CONFIDENTIAL INFORMATION CONTAINED IN THIS DOCUMENT IS THE PROPERTY OF LUMEX INC. SECRET AS SPECIFICALLY AUTHORIZED IN WRITING BY LUMEX INC., THE HOLDER OF THIS DOCUMENT SHALL KEEP ALL INFORMATION CONTAINED HEREIN CONFIDENTIAL AND SHALL PROTECT SAME IN WHOLE OR IN PART FROM DISCLOSURE AND DISSEMINATION TO ALL THIRD PARTIES.

ON	DIVC	DIVITOLL	ED DOCON	VI I I V I
	DATE:	07.10.12	DRAWN BY:	AB
	PAGE:	1 OF 1	CHKD BY:	KF
	SCALE:	NTS	APRVD BY:	KF
	UNIT:	mm [INCH]	Pb	