




TOP VIEW

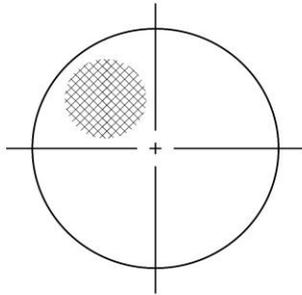

SIDE VIEW

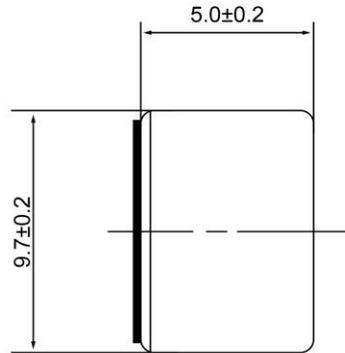

BOTTOM VIEW

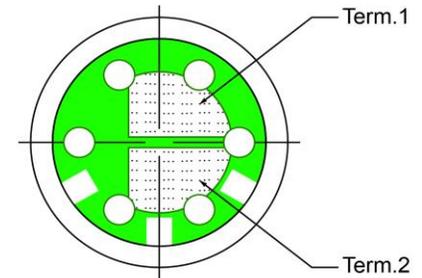

Specifications			Notes	Revision History								
Description	Value	Unit		Version	Description	Date	Approved					
Directivity	Noise Canceling		1) All dimensions are in mm unless otherwise noted 2) All parts meet RoHS	1	Released from Engineering	10/21/2013	J.S					
Technology	Electret Condenser											
Sensitivity	-47	(dB)										
Frequency Range	100 ~ 10,000	(Hz)										
Rated Voltage	1.5	(V)										
Output Impedance	680	(Ohm)										
Connection Method	Solder Pads											
Voltage Range	1.5 ~ 10	(V)										
Max Rated Current	0.5	(mA)										
Minimum Signal to Noise Ratio	>58	(dB)										
Operating Temperature	-20 ~ +60	°C										
Storage Temperature	-20 ~ +70	°C										
 DB UNLIMITED				Electret Condenser Microphone			MN094701-1					
										<table border="1"> <thead> <tr> <th>Drawn by</th> <th>Date</th> <th>Checked by</th> <th>Date</th> <th>Approved by</th> <th>Date</th> </tr> </thead> <tbody> <tr> <td>A.B.</td> <td>10/21/2013</td> <td>C.E.</td> <td>10/21/2013</td> <td>J.S</td> <td>10/21/2013</td> </tr> </tbody> </table>	Drawn by	Date
Drawn by	Date	Checked by	Date	Approved by	Date							
A.B.	10/21/2013	C.E.	10/21/2013	J.S	10/21/2013							

Additional considerations can be found at www.dbunlimitedco.com/technical-articles.