

HiPerFRED²

V_{RRM} = 200 V
I_{FAV} = 2x 15 A
t_{rr} = 35 ns


High Performance Fast Recovery Diode

Low Loss and Soft Recovery


Common Cathode

Part number

DPG30C200HB



Backside: cathode

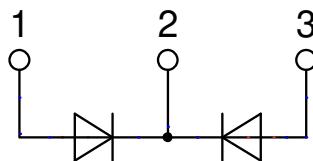

Features / Advantages:

- Planar passivated chips
- Very low leakage current
- Very short recovery time
- Improved thermal behaviour
- Very low I_{rm}-values
- Very soft recovery behaviour
- Avalanche voltage rated for reliable operation
- Soft reverse recovery for low EMI/RFI
- Low I_{rm} reduces:
 - Power dissipation within the diode
 - Turn-on loss in the commutating switch

Applications:

- Antiparallel diode for high frequency switching devices
- Antisaturation diode
- Snubber diode
- Free wheeling diode
- Rectifiers in switch mode power supplies (SMPS)
- Uninterruptible power supplies (UPS)

Package: TO-247

- Industry standard outline
- RoHS compliant
- Epoxy meets UL 94V-0

Disclaimer Notice


Information furnished is believed to be accurate and reliable. However, users should independently evaluate the suitability of and test each product selected for their own applications. Littelfuse products are not designed for, and may not be used in, all applications. Read complete Disclaimer Notice at www.littelfuse.com/disclaimer-electronics.

Fast Diode

Symbol	Definition	Conditions	Ratings			
			min.	typ.	max.	
V_{RSM}	max. non-repetitive reverse blocking voltage	$T_{VJ} = 25^\circ\text{C}$			200	V
V_{RRM}	max. repetitive reverse blocking voltage	$T_{VJ} = 25^\circ\text{C}$			200	V
I_R	reverse current, drain current	$V_R = 200 \text{ V}$ $V_R = 200 \text{ V}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 150^\circ\text{C}$		1 0.08	μA mA
V_F	forward voltage drop	$I_F = 15 \text{ A}$ $I_F = 30 \text{ A}$ $I_F = 15 \text{ A}$ $I_F = 30 \text{ A}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 150^\circ\text{C}$		1.25 1.50 1.00 1.27	V V V V
I_{FAV}	average forward current	$T_C = 145^\circ\text{C}$ rectangular $d = 0.5$	$T_{VJ} = 175^\circ\text{C}$		15	A
V_{F0} r_F	threshold voltage slope resistance } for power loss calculation only		$T_{VJ} = 175^\circ\text{C}$		0.69 17.3	V $\text{m}\Omega$
R_{thJC}	thermal resistance junction to case				1.7	K/W
R_{thCH}	thermal resistance case to heatsink			0.3		K/W
P_{tot}	total power dissipation		$T_C = 25^\circ\text{C}$		90	W
I_{FSM}	max. forward surge current	$t = 10 \text{ ms}; (50 \text{ Hz}), \text{sine}; V_R = 0 \text{ V}$	$T_{VJ} = 45^\circ\text{C}$		240	A
C_J	junction capacitance	$V_R = 150 \text{ V}$ $f = 1 \text{ MHz}$	$T_{VJ} = 25^\circ\text{C}$	20		pF
I_{RM}	max. reverse recovery current		$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	3 6.5		A A
t_{rr}	reverse recovery time	$I_F = 15 \text{ A}; V_R = 130 \text{ V}$ $-di_F/dt = 200 \text{ A}/\mu\text{s}$	$T_{VJ} = 25^\circ\text{C}$ $T_{VJ} = 125^\circ\text{C}$	35 55		ns ns

Package TO-247

Symbol	Definition	Conditions	min.	typ.	max.	Unit
I_{RMS}	RMS current	per terminal ¹⁾			50	A
T_{VJ}	virtual junction temperature		-55		175	°C
T_{op}	operation temperature		-55		150	°C
T_{stg}	storage temperature		-55		150	°C
Weight				6		g
M_d	mounting torque		0.8		1.2	Nm
F_c	mounting force with clip		20		120	N

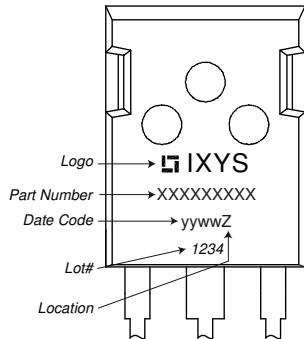Product Marking

Part description


D = Diode
P = HiPerFRED
G = extreme fast
30 = Current Rating [A]
C = Common Cathode
200 = Reverse Voltage [V]
HB = TO-247AD (3)


Ordering	Ordering Number	Marking on Product	Delivery Mode	Quantity	Code No.
Standard	DPG30C200HB	DPG30C200HB	Tube	30	505797

Similar Part	Package	Voltage class
DPG30C200PB	TO-220AB (3)	200
DPG30C200PC	TO-263AB (D2Pak) (2)	200


Equivalent Circuits for Simulation
^{*}on die level

 $T_{VJ} = 175^\circ\text{C}$

	Fast Diode	
$V_{0\ max}$	threshold voltage	0.69 V
$R_{0\ max}$	slope resistance *	14.7 mΩ

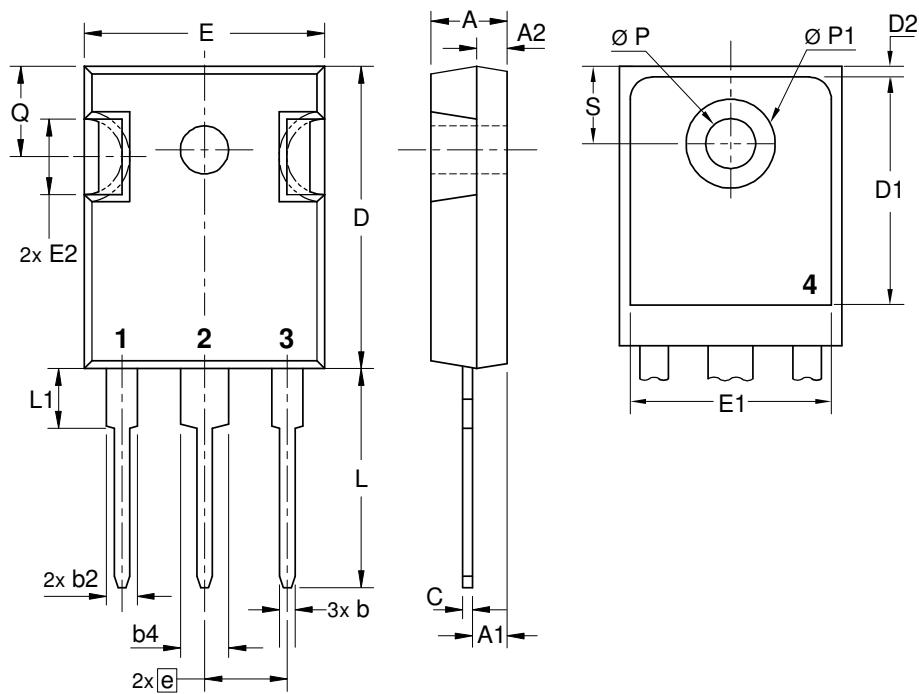Outlines TO-247


Sym.	Inches min. max.	Millimeter min. max.
A	0.185 0.209	4.70 5.30
A1	0.087 0.102	2.21 2.59
A2	0.059 0.098	1.50 2.49
D	0.819 0.845	20.79 21.45
E	0.610 0.640	15.48 16.24
E2	0.170 0.216	4.31 5.48
e	0.215 BSC	5.46 BSC
L	0.780 0.800	19.80 20.30
L1	- 0.177	- 4.49
Ø P	0.140 0.144	3.55 3.65
Q	0.212 0.244	5.38 6.19
S	0.242 BSC	6.14 BSC
b	0.039 0.055	0.99 1.40
b2	0.065 0.094	1.65 2.39
b4	0.102 0.135	2.59 3.43
c	0.015 0.035	0.38 0.89
D1	0.515 -	13.07 -
D2	0.020 0.053	0.51 1.35
E1	0.530 -	13.45 -
Ø P1	- 0.29	- 7.39

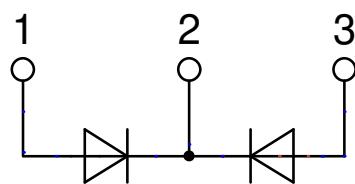

Fast Diode

