



Technical Data Sheet

PEWAN102-10SM

Features

- 7 GHz to 11 GHz
- WR-102 Waveguide Band

- 10 dBi Nominal Gain
- · SMA Male Connector

Applications

- Antenna Measurements
- · Wireless Communication
- Laboratory Use

- · Microwave Radio Systems
- · Radome Testing
- Automotive Antenna Test

Solutions

- · Radar Cross Section
- Satellite Antenna Testing

Description

The PEWAN102-10SM standard gain horn antenna (also known as waveguide horn) from Pasternack is part of our comprehensive selection of waveguide antennas. This standard gain horn is mated with a WR-102 to SMA Male waveguide to coaxial adapter and operates from 7 GHz to 11 GHz.

Our PEWAN102-10SM standard gain horn antenna has a nominal gain of 10 dBi with a Horizontal and Vertical HPBW (Half Power Beam Width) of 52.1 dB and 51.6 dB respectively. Pasternack's SMA Male to WR-102 standard gain horns are available in 10, 15 and 20 dBi models with pyramidal shape and connectorized input.

Waveguide antennas, such as the PEWAN102-10SM are used in a wide variety of applications due to the high-power handling capability, low loss, high directivity, and near constant electrical performance. Our WR-102 waveguide antennas with SMA Male interface is part of over 40,000 RF, microwave and millimeter wave components from Pasternack available worldwide and Ship same day.

Configuration

Design Coaxial Interface WR-102 Standard Gain Horn SMA Male

Electrical Specifications

Description	Minimum	Typical	Maximum	Units
Frequency Range	7		11	GHz
Waveguide Standard Gain Horn				
Gain		10		dBi
Horizontal Half Power Beam Width		52.1		Degrees
Vertical Half Power Beam Width		51.6		Degrees
Vaveguide to Coaxial Adapter				
Input VSWR			1.3:1	

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-102 Standard Gain Horn with 10 dBi gain, SMA Male connector PEWAN102-10SM

Pasternack Enterprises, Inc. • P.O. Box 16759, Irvine, CA 92623 **Phone:** (866) 727-8376 or (949) 261-1920 • **Fax:** (949) 261-7451





Technical Data Sheet

PEWAN102-10SM

Mechanical Specifications

Size

 Length
 3.335 in [84.71 mm]

 Width
 1.685 in [42.8 mm]

 Height
 1.685 in [42.8 mm]

 Weight
 0.2768 lbs [125.55 g]

RF Connector

Type SMA Male

Waveguide Interface

Waveguide Size WR-102

Environmental Specifications

Compliance Certifications (see product page for current document)

Plotted and Other Data

Notes:

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-102 Standard Gain Horn with 10 dBi gain, SMA Male connector PEWAN102-10SM






Technical Data Sheet

PEWAN102-10SM

Typical Performance Data

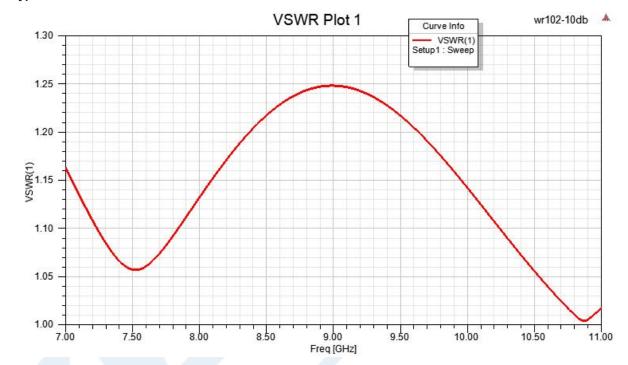


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-102 Standard Gain Horn with 10 dBi gain, SMA Male connector PEWAN102-10SM





Technical Data Sheet

PEWAN102-10SM

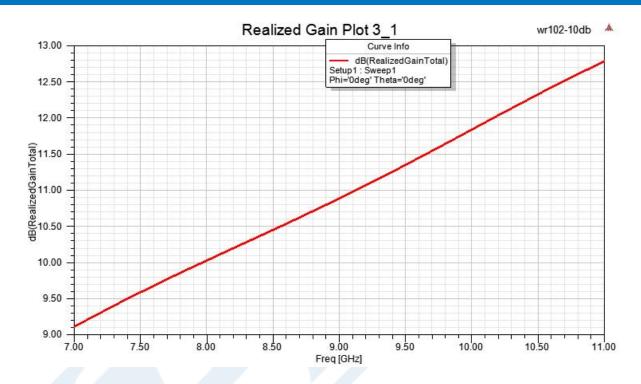

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-102 Standard Gain Horn with 10 dBi gain, SMA Male connector PEWAN102-10SM


4





Technical Data Sheet

PEWAN102-10SM

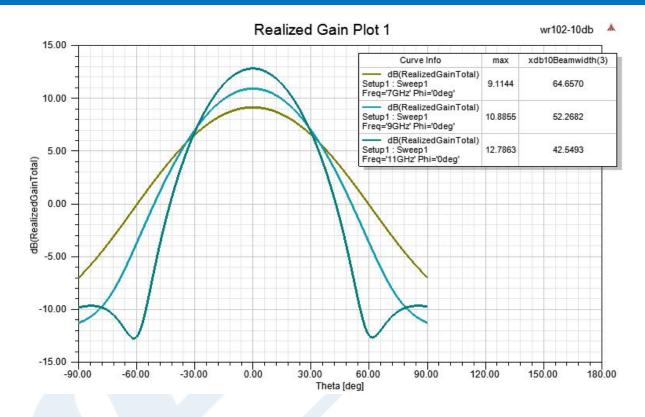


Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-102 Standard Gain Horn with 10 dBi gain, SMA Male connector PEWAN102-10SM





Technical Data Sheet

PEWAN102-10SM

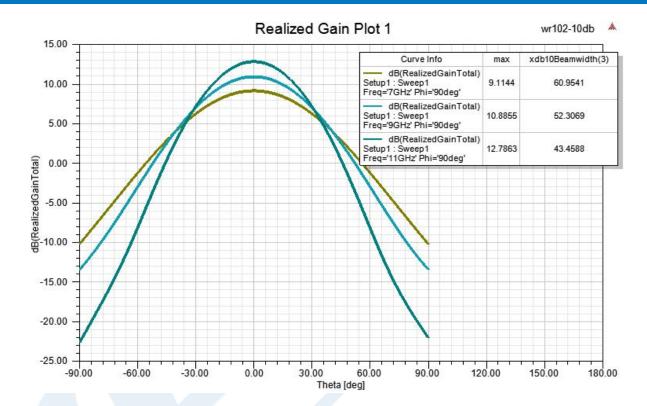

WR-102 Standard Gain Horn with 10 dBi gain, SMA Male connector from Pasternack Enterprises has same day shipment for domestic and International orders. Our RF, microwave and millimeter wave products maintain a 99.4% availability and are part of the broadest selection in the industry.

Click the following link (or enter part number in "SEARCH" on website) to obtain additional part information including price, inventory and certifications: WR-102 Standard Gain Horn with 10 dBi gain, SMA Male connector PEWAN102-10SM

URL:

The information contained in this document is accurate to the best of our knowledge and representative of the part described herein. It may be necessary to make modifications to the part and/or the documentation of the part, in order to implement improvements. Pasternack reserves the right to make such changes as required. Unless otherwise stated, all specifications are nominal. Pasternack does not make any representation or warranty regarding the suitability of the part described herein for any particular purpose, and Pasternack does not assume any liability arising out of the use of any part or documentation.

PEWAN102-10SM CAD DrawingWR-102 Standard Gain Horn with 10 dBi gain, SMA Male connector

